




 PRODUCTS FOR BATTERY

Tab Leads

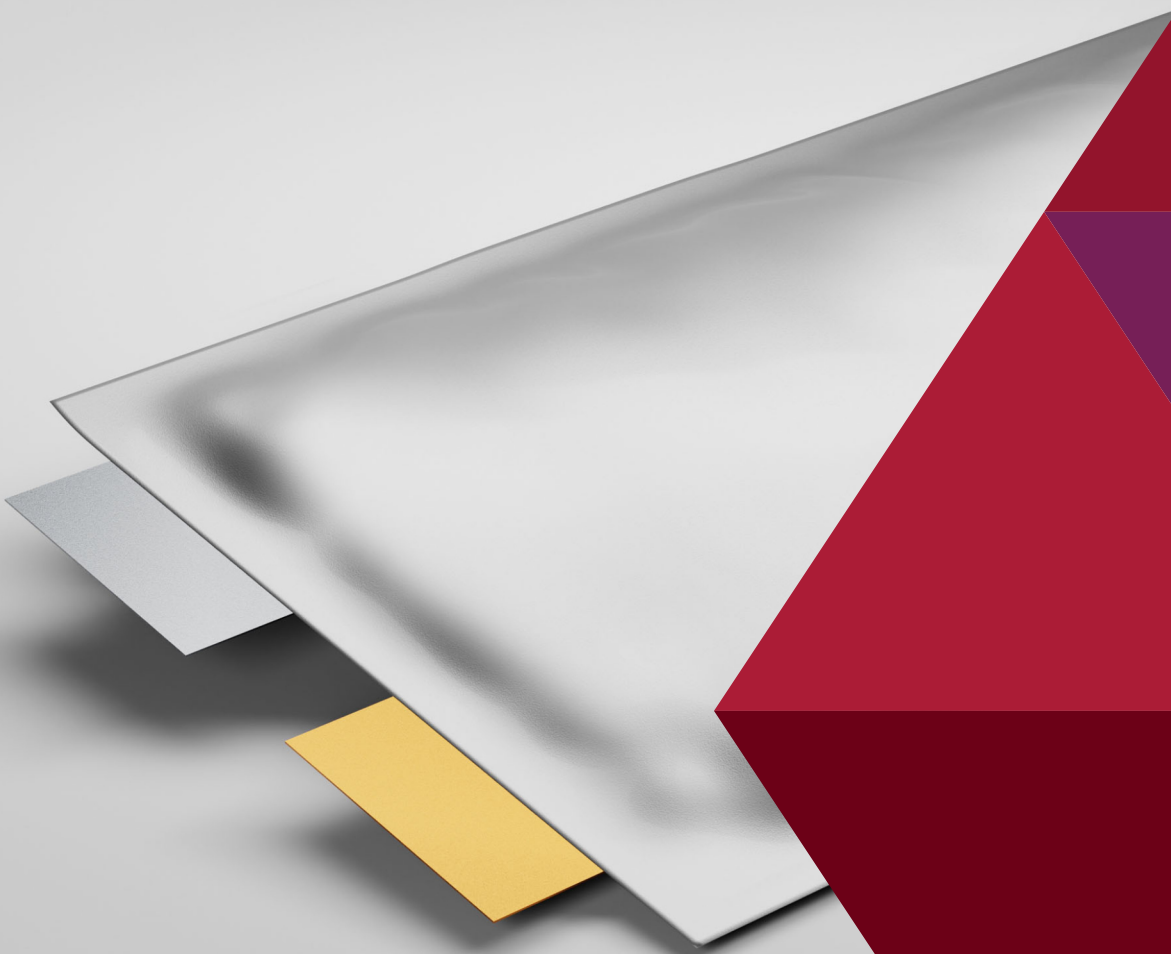


Product Description

High quality and customisable tab lead for your pouch battery

Advantages


- » Surface treatment technology to prevent corrosion of tab leads for durability to support battery life
- » Producing customised tab lead to meet customers' specification
- » Adhesive reliability between the metal conductor and the sealing film for longevity
- » Insulation properties of the sealing film for achieving safer battery

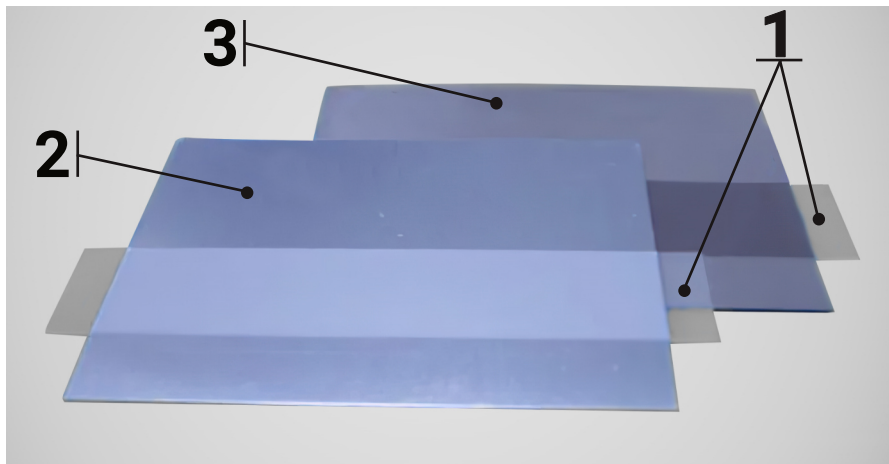


	Names	Materials	Features
1	Sealant film	Polypropylene	<ul style="list-style-type: none">• Multiple structure• Thermal weldability
2	Cathode conductor	Aluminium (Al)	<ul style="list-style-type: none">• High purity• Surface treatment
3	Anode conductor	Nickel plated copper	<ul style="list-style-type: none">• Adhesion of plating coating• Surface treatment

Tab leads made of materials other than copper with aluminium or nickel plating.

- » Stainless steel tab leads
- » Copper tab leads (for experimental use) etc.




T-shape, L-shape




Thick-shape



Double-jointed



U-shape



Perforated C-side

For more information please reach out to mobility@nagase.eu

NAGASE (EUROPA) GmbH

Werdener Strasse 4, 40227 Düsseldorf, Germany, Tel: +49(0)211 866200